

FIGURE 1

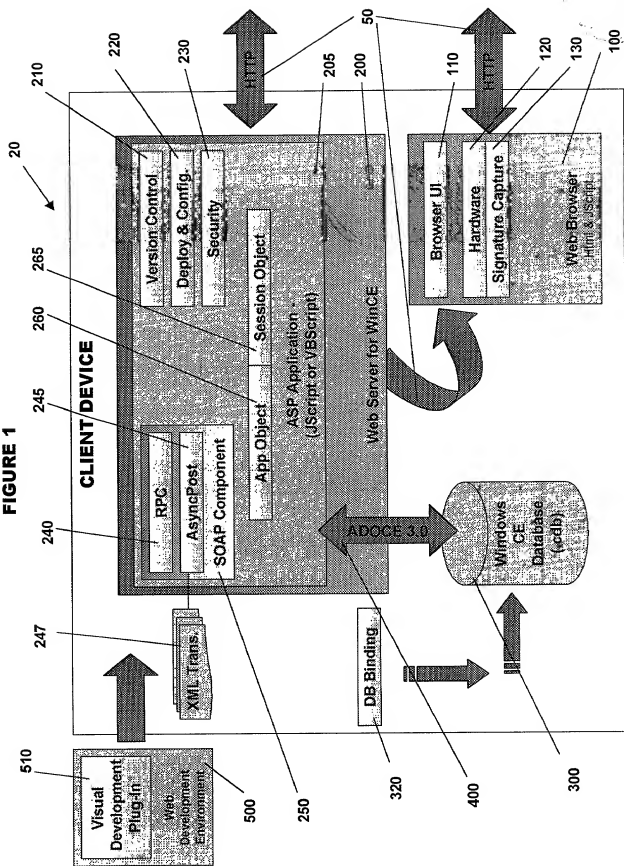


FIGURE 2


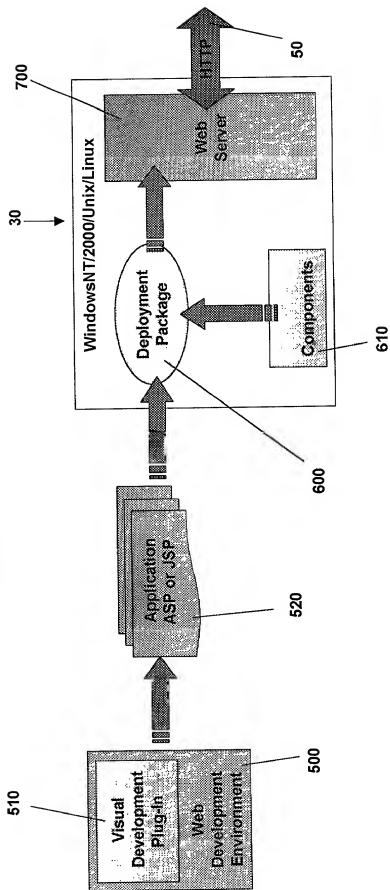


FIGURE 3

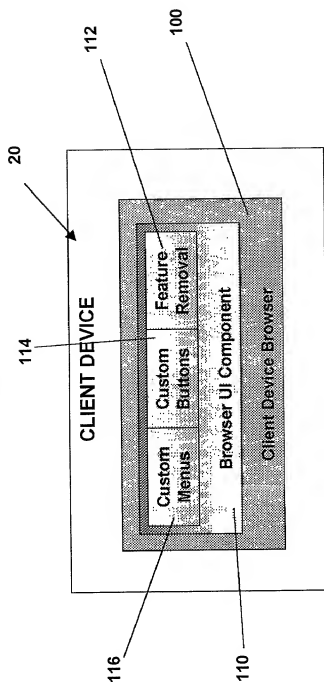

TOP SECRET 220960

FIGURE 4

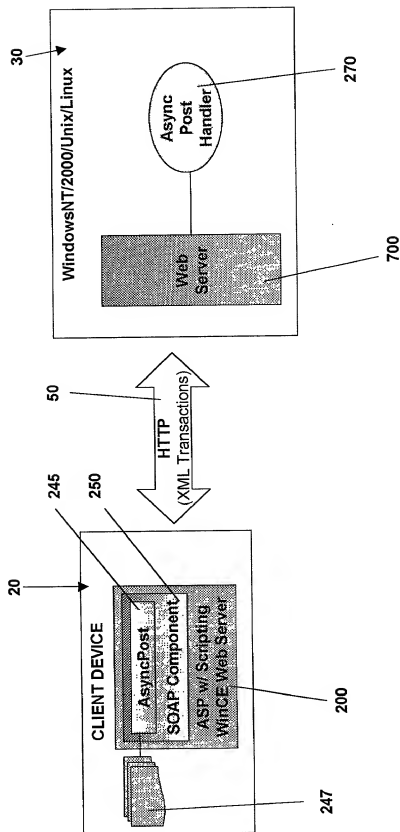


FIGURE 5

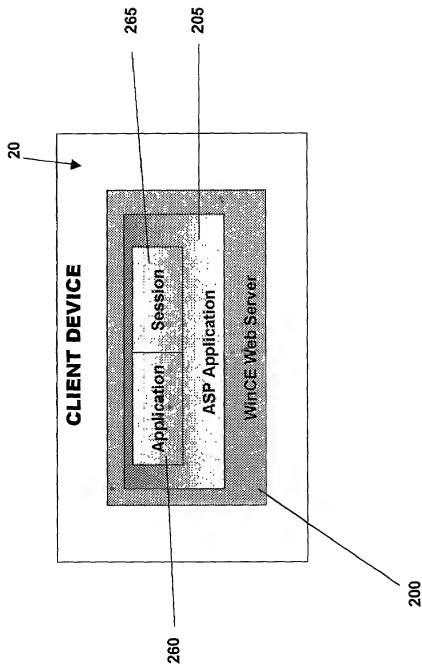


FIGURE 6

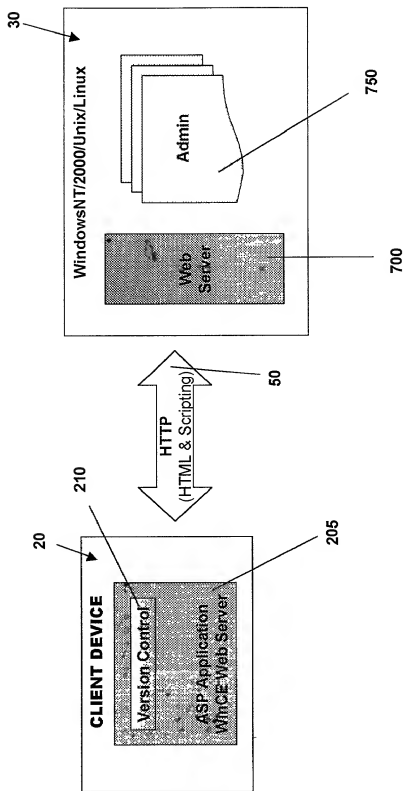


FIGURE 7


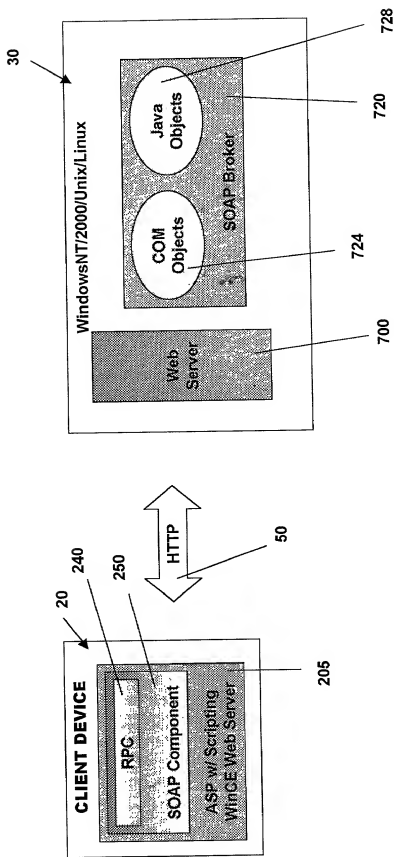


FIGURE 8

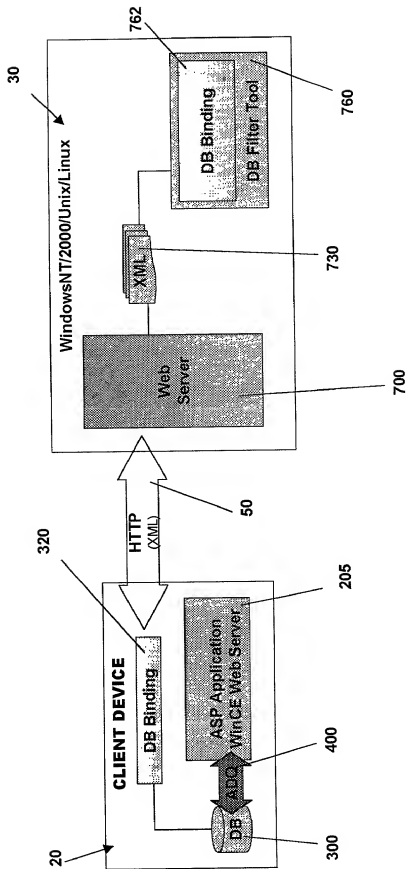


FIGURE 9

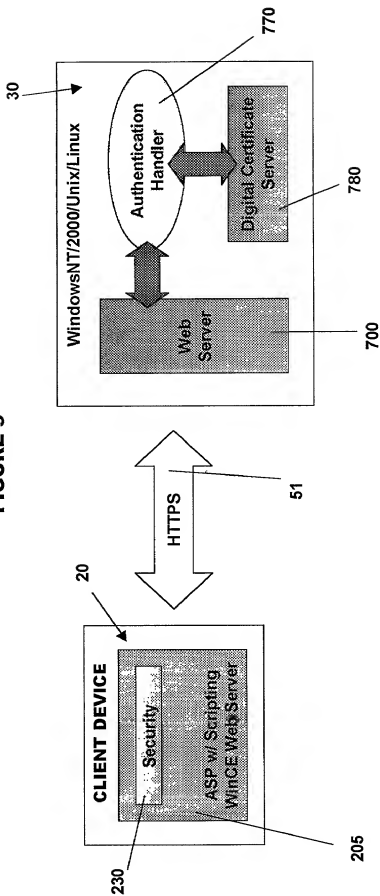


FIGURE 10

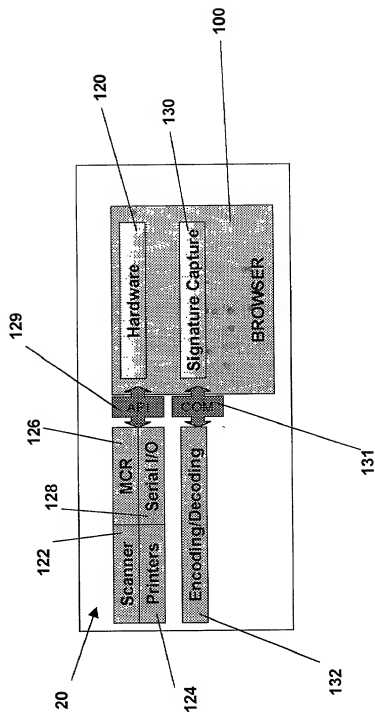


FIGURE 11

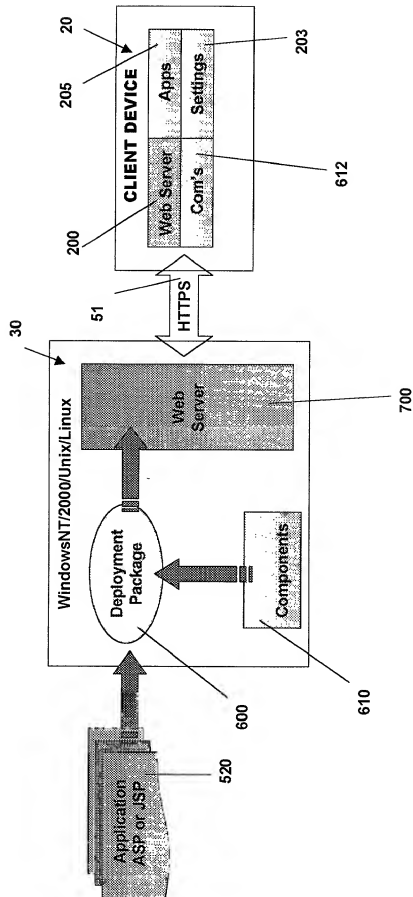


FIGURE 12


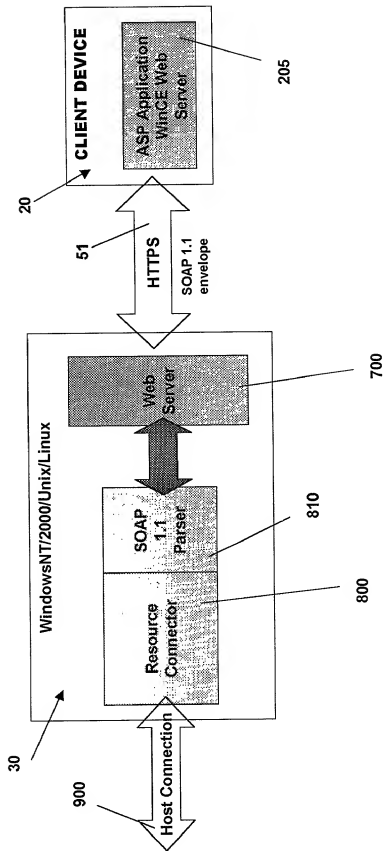


FIGURE 13

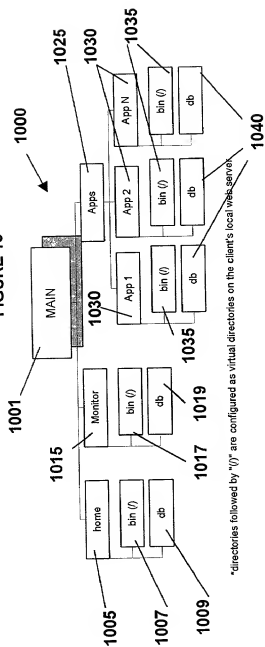

*directories followed by "/" are configured as virtual directories on the client's local web server.

FIGURE 15

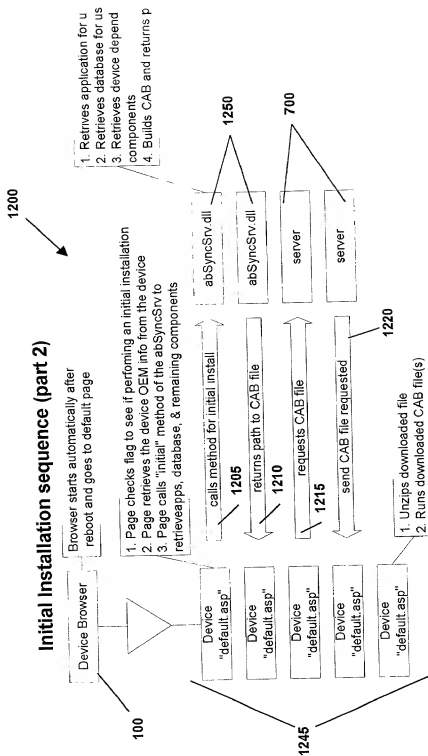


FIGURE 16

Execution of Device Sync Page


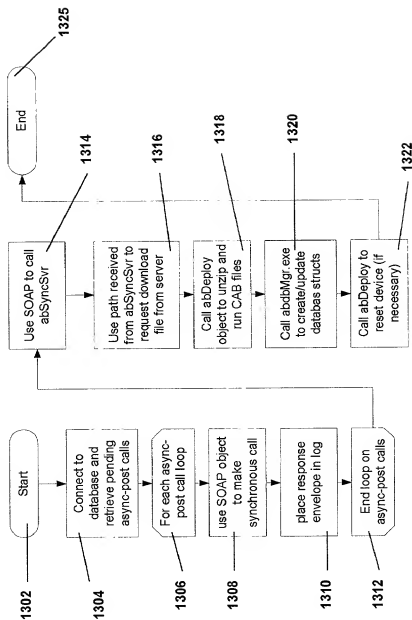


FIGURE 17

Execution of Sync Svr (initial install)

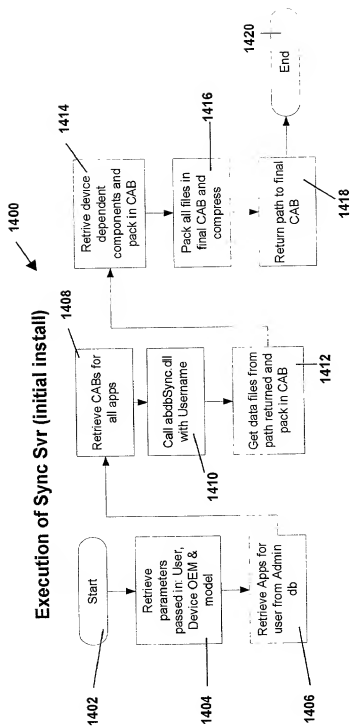

Execution of Sync Svr (normal sync)


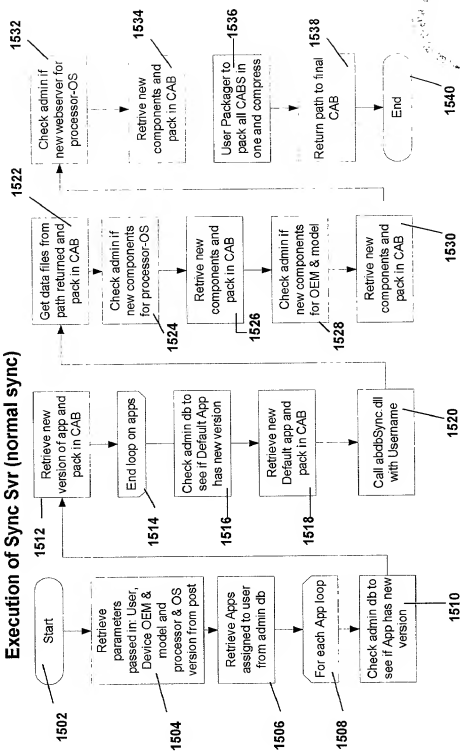



FIGURE 19

Execution of SOAP call from ASP

1600

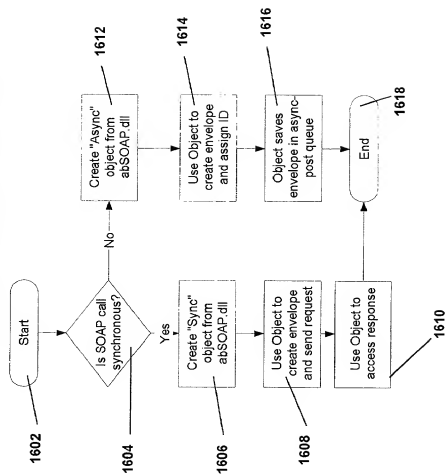

1700

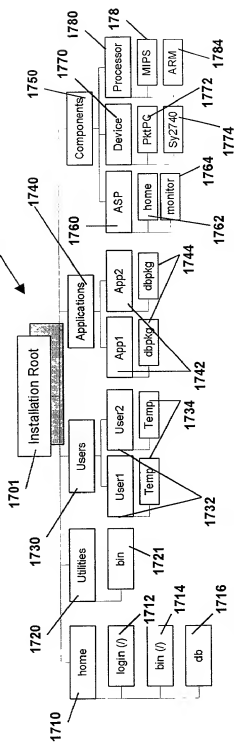

t directories followed by "*i*") are configured as virtual directories on the central web server